




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 7/212, 7/26	A1	(11) International Publication Number: WO 99/49592 (43) International Publication Date: 30 September 1999 (30.09.99)
(21) International Application Number: PCT/CA99/00247 (22) International Filing Date: 23 March 1999 (23.03.99) (30) Priority Data: 60/079,134 24 March 1998 (24.03.98) US 2,237,289 11 May 1998 (11.05.98) CA (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/079,134 (CON) Filed on 24 March 1998 (24.03.98) (71) Applicant (for all designated States except US): VISTAR TELECOMMUNICATIONS INC. [CA/CA]; Suite 1410, 427 Laurier Avenue, West, Ottawa, Ontario K1G 3J4 (CA). (72) Inventors; and (75) Inventors/Applicants (for US only): HAUGLI, Hans-Christian [CA/CA]; 388 Mariposa Avenue, Rockcliffe Park, Ottawa, Ontario K1M 0S9 (CA). SEMBI, Bachittar, Singh [CA/CA]; 10 Vermeer Way, Kanata, Ontario K2K 2M1 (CA). ARM-BRUSTER, Brian [CA/CA]; 24 Kimmins Court, Kanata, Ontario K2K 2M4 (CA).		(74) Agents: MacGREGOR, George et al.; Marks & Clerk, P.O. Box 957, Station B, Ottawa, Ontario K1P 5S7 (CA). (81) Designated States: AU, BR, CA, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: TDMA PACKET DATA COMMUNICATION SYSTEM

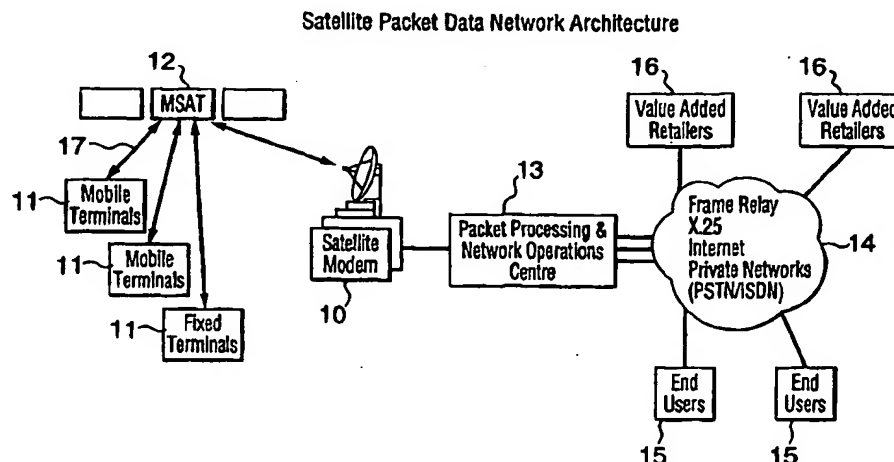

(57) Abstract

A packet data communication system includes a control station and a plurality of mobile terminals that communicate on demand with the control station over a wireless link. The control station has a data port for receiving data packets destined for the terminals, an arrangement for generating a plurality of data channels for carrying the data packets, and an arrangement for assigning the data packets destined for a particular terminal to one or more of the data channels. A control channel carries control information pertaining to the data channels. The channels are transmitted to the mobile terminals as an r.f. signal. The terminals have a receiver for receiving the r.f. signal, an analog-to-digital converter for digitizing the received signal, and a buffer for storing the digitized received signal. The terminals continually monitor the control channel to extract control information. The stored signal is processed to extract packet data destined for the terminal from one or more of the data channels in response to control information received on the control channel.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

TDMA PACKET DATA COMMUNICATION SYSTEM

This application claims the benefit under 35 USC 119(e) of prior United States provisional application number 60/079,134 filed March 24, 1998.

This invention relates to a packet data communication system suitable for transferring data between a large number of mobile terminals and a central control station. The system is particularly suited for a satellite based system, where the central control communicates with the terminals via an orbiting satellite, but it could be applied to ground based systems.

10 There are many situations where it is desirable to transfer data between a control station and a plurality of distributed mobile terminals. For example, in the trucking industry, the truck's on-board monitoring and logging devices may automatically report usage and location information back to a central station. Also, information relating to the environmental conditions, condition of the load, for example, or the temperature of refrigerated containers, can be reported. The operator may need to send schedule or routing changes to the drivers. Paging systems require text messages to be sent to individual customers. Traditionally these systems have carried relatively small amounts of data and do not require wideband channels. The bandwidth requirements, however, can change from time to time depending on the type and amount of data that needs to be transferred. Clearly, for example, voice channels will require a wider bandwidth channel
20 than one that merely communicates position or environmental information.

Typically, SCPC (a Single Carrier per Channel) techniques are employed for such systems. In SCPC, as the name implies, each active channel is assigned a single narrow band carrier, typically not more than 20 KHz wide. The assigned channel depends on availability and desired bit rate. Bit rates are typically 0.6, 4, 8, 19.2, kilobits per second. When the control station wishes to send a message to the terminal, the targeted terminal is notified over a very low bit rate control channel that it should expect to receive a message on a particular frequency. The targeted terminal then tunes to that frequency in order to receive and decode the incoming message.

30 In order to provide a sufficient number of channels, the maximum channel bit rate is typically limited to 19.2 kilobits per second. This means that such systems are not

capable of carrying high quality voice signals, which typically require at least 32 kilobits per second. Such systems are generally not suitable for handling graphic information such as web pages, which is becoming an increasingly important application.

The need to assign a message channel over a control channel before passing the message also introduces a delay, known as latency, which makes it difficult to conduct interactive communications, for example, with the keyboard in real time.

An object of the invention is to provide a system that alleviates these disadvantages.

10 According to the present invention there is provided a packet data communication system having a control station and a plurality of remote terminals that communicate on demand with said control station over a wireless link, said control station comprising a data port for receiving data packets destined for said terminals; means for generating a plurality of data channels for carrying said data packets; means for assigning said data packets destined for a particular terminal to one or more of said data channels; means for generating a control channel carrying control information pertaining to said data channels; and means for transmitting said carriers to said mobile terminals as an r.f. signal; and each of said terminals comprising a receiver for receiving said r.f. signal; an analog-to-digital converter for digitizing said received signal; a buffer for storing said digitized received signal; means for monitoring said control channel to extract control
20 information therefrom; and means for processing said stored signal to extract said packet data destined for said terminal from one or more of said data channels in response to control information received on said control channel.

Normally the received signal will be downconverted and demodulated to baseband prior to analog-to-digital conversion, although if desired with high speed processors it is contemplated that the entire processing could take place in the digital domain.

The remote terminals can either be fixed or mobile.

This system has the advantage of flexibility. Data packets can be sent on one channel or distributed simultaneously over several channels depending on the bandwidth requirements. For low bit rates, a single channel can be shared among several terminals.
30 Unlike the prior art, it is not necessary for the channel assignment information to be sent

in advance of the message. The assignment information on the control channel and the message can be sent simultaneously since the raw incoming data is stored. Only minimal processing is required to extract assignment information unless the control channel indicates that a message is addressed to the terminal in question, in which case the message can be extracted from the assigned carrier(s).

The carriers are preferably generated in a digital signal processor (DSP), which carries out the channel assignments. The channels are then transmitted by means of the r.f. carrier, normally via satellite, to the destination terminals.

10 The aggregate channels on the r.f. carrier are transmitted as frames bounded by predetermined time instants. Each buffer typically stores one frame of information. Each frame can contain multiple packets distributed across multiple channels.

The control information informs a particular terminal that the current frame contains a message for that terminal, as well as the channel assignments, and time and frequency reference information. Only minimal processing is required at the terminals to monitor the control channel since this has a very narrow bandwidth, typically 600 b.p.s. No attempt is made to decode the data unless a message is received from the control channel that data is present for the terminal in question.

20 Each terminal also contains a DSP, which on receipt of a control message decodes the currently stored frame to extract data packets destined for that terminal. If the data contains wideband information, such as graphics, the packets are likely to be distributed sequentially over several channels. The DSP will extract the packets from the various channels in accordance with the information received on the control channel and arrange them in the appropriate order before outputting them to the data processing circuitry.

The signal processing is preferably carried out with an advanced DSP, such as the TMS320C60.

The system is thus capable of generating and demodulating simultaneous multiple carriers within the sampling bandwidth. Per frame adaptive processing of multiple carriers is achieved through buffered data and sequential processing.

30 The system can support multiple bit rates and power levels. It can also support multiple return access methods, such as unslotted ALOHA, slotted ALOHA and assigned

channel. It can be used for mobile dispatch services employed text and canned messages, medium length messages with low latency, as well as for TCP/IP connections which provide LAN extension, FT protocol, email and database transactions.

The invention also provides a method of establishing communication between a control station and one or more of a plurality of mobile terminals over a wireless link, comprising the steps of generating a plurality of carriers; dynamically assigning one or more data carriers to a destination terminal; modulating said one or more carriers with packet data for said destination terminal; generating a control carrier containing information pertaining to said modulated carriers; transmitting said data carriers and said control carrier as an aggregate signal to said destination terminal; buffering said aggregate signal at said destination terminal; extracting said control information from said aggregate signal; and extracting data from said buffered signal in response to a received assignment in said control information.

The invention also provides a system for improving data throughput by utilizing a bandwidth manager. The bandwidth manager monitors network parameters and compares current parameters with statistical data stored in a database. Heuristic rules are used to decide what changes need to be made to the parameters to optimize throughput.

The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings, in which:-

- 20 Figure 1 is a block diagram of a multiple rate satellite packet data system;
- Figure 2 shows the forward link spectrum;
- Figure 3 is a block diagram of a part of a satellite ground station;
- Figure 4 illustrates a frame on the forward link;
- Figure 5 is a block diagram of a remote terminal;
- Figure 6 is a more detailed diagram of a remote terminal;
- Figures 7a shows a prior art protocol and Figure 7b shows a protocol with simultaneous transmission of data;
- Figure 8 shows the spectral distribution of the return link; and

Figure 9 is a block diagram of a bandwidth manager.

Referring to Figure 1, a satellite ground station 10 communicates with remote terminals 11 over two-way r.f. links, which may be either fixed or mobile, via satellite 12, such as an MSAT. The links can operate at any frequency capable of carrying data. In the case of satellites, this will typically lie in the gigahertz range. The satellite 12 could, for example, be INMARSAT .

The ground station 10 is connected to the packet processing network operations center 13, which in turn is connected over a wide area packet network 14 to end users 15 or value added retailers 16. The packet network 14 may, for example, be frame relay,
10 X.25, Internet, a private network, or the PSTN/ISDN.

The end users can be equipment operators, such as trucking companies wishing to communicate with mobile terminals in their trucks. The value added retailers could, for example, be paging operators selling paging services to the public.

The bandwidth requirements can vary significantly according to the type of information to be transmitted. Simple text messages, such as are sent by paging services, require very little bandwidth, whereas voice or graphics messages require much greater bandwidth. The invention permits wide bandwidth messages to be aggregated over several channels and the appropriate assignment information to be transmitted simultaneously to the mobile terminals.

20 The ground station 10 receives packet data destined for a particular terminal from the network processing center 13 and forwards it via satellite 12 to the destination terminal 11. The ground station 10 generates a plurality of SCPC (Single Channel Per Carrier) data carriers of predetermined, but varying, bandwidth in a digital signal processor, assigns the packets to one of more of the data carriers and then transmits the aggregate signal, after upconversion, over r.f. links 17 to the terminals 11. In addition, the ground station 10 transmits a narrow band control channel, typically 600 bps., containing the timing and reference information that the terminal needs to extract the packet data from the transmitted frames. The control channel also notifies the terminals when frame
30 contains information destined for them and how the information is distributed across the available channels.

Figure 2 shows the link spectrum for the forward link. In the example given, this consists of a 19.2 kbps TDM data channel, a 600 bps control channel, which is typically centered for convenience of access, a 600 bps data channel and a 4800bps data channel. These channels, which can be thought of as a series of modulated carriers are actually created in the digital domain in the digital signal processor in the control station. The channels extend over a bandwidth of 100 KHz or more. The channels are combined in the digital signal processor to form a baseband signal, which is then passed through a digital-to-analog converter to create an analog baseband signal. This is then modulated in a Quadrature modulator onto a carrier, typically at 1450Mhz. This signal is typically
10 upconverted to a frequency in the order of 13GHz for transmission over the links 17 to the satellite 12. The Q modulators allow two separate baseband signals, each consisting of several channels, to be carried on the same carrier.

Figure 3 is a block diagram of the carrier processing section in the control station. This consists of four TMS320C60 digital signal processors 20, one for each satellite beam, each connected to an analog-to-digital converter 21 and digital-to-analog converter 22, which in turn are respectively connected to Quadrature demodulators 23 associated with frequency synthesizers 24 and Quadrature modulators 25 associated with frequency synthesizers 26. The output of the Q modulators 23 is combined in a transmit combiner 27 to generate an IF signal at 1450 Mhz. This IF signal is eventually upconverted to
20 13GHz for satellite transmission.

The data packets are received over a leased line 28 from packet network 14 by access server 29, which addresses the packets to the appropriate terminal. The access server 29, as well as a timing module 30 and host PC 31 are connected to the DSPs 20 over bus 32.

The DSPs 20 generate carriers between 0 and 100 KHz in the digital domain. Incoming data packets are buffered and then mixed with one or more digital subcarriers, depending on the data rate, and the subcarriers combined into a baseband signal, typically ranging from 0 to 100KHz. The DSPs also create a control channel, which in addition to carrying timing information, carries the channel assignments to the remote
30 terminals.

The carriers are combined in the DSP and outputted as a 0-50KHz (0-100KHz) baseband signal, which is passed through DAC 22 before being input to Qmod 25, which creates a 1450MHz IF signal for upconversion to the frequency of the satellite link.

Typically, the DSPs 20 generate up to ten carriers over 50KHz of bandwidth. The carriers can have different channel rates, such as 0.6, 4.8, 19.2 bps at different power levels to support terminals with different antenna characteristics, such as gain, size, etc. If packets arrive for a particular terminal at a very low bit rate, it may be possible to send them out on a single carrier. However, if the rate is too great for a single carrier, they can be distributed across one or more channels and transmitted simultaneously. The DSPs 20 keep track of the channel assignments and transmit this information to the remote terminals on the control channel.

The system also allows the dynamic assignment of data packets to various channel types as warranted. While waiting to be transmitted, data packets are stored in queues at the control station 10 or at a mobile terminal. 11. Based on the number of packets in the queue, the growth rate of the queue, and the protocol used by the application (e.g. FTP, HTTP, email, etc.), a decision can be made to use random access channels, assigned TDM or TDMA channels, or dedicated (stream) channels to transmit the packet(s). Because these channels can be created dynamically, and the traffic can be assigned to them as warranted, the latency for transmission of data packets can be minimized if appropriate, while using the transmission bandwidth effectively.

This flexibility is particular powerful for the transmission of TCP/IP based communications, where the data rate required by the applications varies widely from instant to instant. The dynamic selection system allows the flexibility to respond to this variation in a flexible manner.

For example, a user at a mobile terminal 11 may be using a WWW client to browse information on the Web. After he clicks on a link to request a new page from a server, a series of communications occur. First there is a query from the MT 11 to a Domain Name Server (DNS) on the Internet to get the IP address of the server, then a response from the DNS, then a request by the MT to get the page from the WWW server. This initial exchange of small packets can be done using random access channels in the return and forward directions. When the WWW page data begins to be delivered from

the server, the queue for that MT at the satellite packet processing centre 13 begins to grow. At this point the dynamic channel selection process could decide to assign a TDM channel from the satellite ground station 10 to the MT 11 to deliver the rest of the data to the MT. Similarly, the acknowledgements of the data packets returned by the MT to the server could be carried by an assigned TDMA return channel.

The user may then wish to upload a file from his MT to a FTP server on the Internet. As FTP transfers are typically large, a return stream channel could be created from the MT to the satellite ground station. The forward acknowledgements could be carried in a assigned TDM channel.

- 10 The packet lengths can vary and be mixed, but they typically may be 64, 256, 1000 and 4000 bits. The packets are transmitted in frames, which typically may have a duration of over one second and contain 8 to 324 packets.

Figure 4 shows a typical 4.8 Kbps frame. This has a duration of 1.08 seconds and contains 5,184 bits including a 64-bit header. The remaining 5120 bits can be sent as 80 packets of 64, bits 20 packets of 256 bits, 5 packets of 1024 bits, one packet of 4096 bits plus 16 packets of 64 bits, one packet of 4096 bits plus four packets of 256 bits, or one packet of 4096 bits plus one packet of 1024 bits.

Each frame may contain several carriers. The forward link channel characteristics might typically be as follows:

Information Rate bps	FEC rate	Channel Rate	Modulation	Bandwidth	C/N ₀
600	1/2	1,200	BPSK	2,400	32.3
4800	3/4	6,400	QPSK	6,400	42.3
19,200	3/4	25,600	8PSK	17,100	51

20

Examples of forward link channel mixes are as follows:

TOTAL CAPACITY	NUMBER OF 600 BPS CHANNELS	NUMBER OF 4800 BPS CHANNELS	NUMBER OF 19200 BPS CHANNELS	TOTAL BANDWIDTH
5.4 kbps	9+(1)	0	0	50 kHz
38.4 kbps	(1)	0	2	37 kHz
48 kbps	(1)	2	2	50 kHz
19.2 kbs	(1)	4	0	25 kHz

For example, if packet data is arriving for a particular terminal at an average rate of 5.4 kbps per second, this data can be sent to the destination terminal by distributing it over 9 simultaneous 600 bps carriers. The rate is an average rate because the incoming data is buffered to even out bursts. Data can be sent at the rate of 38.4 kbs by sending it simultaneously on two 19.2 kbs carriers. 19.2 kbs can also be achieved by sending the data simultaneously on four 4.8kbs carriers. This allows considerable flexibility depending on the data rate requirements and the availability of channels.

Each frame after passing through the digital-to-analog converter 22 is an analog baseband waveform containing all the carriers.

10 Figure 5 is a block diagram of a remote terminal. In Figure 5, the r.f. signal on the satellite downlink is picket up by antenna 30 and passed to Q demodulator 31 associated with frequency synthesizer 32. The demodulated basedband signal is passed to analog-to-digital converter 33, where it is quantized and stored in buffer 34 one frame at a time. The buffer 34 always stores the current frame regardless of whether that frame contains data for the associated terminal.

The central portion of the frame in the frequency domain contains the control signal, which DSP 35 recognizes and continually extracts. DSP 35 can be a type TMS320C60 or other advanced high speed digital signal processor.

20 The DSP continually extracts from the control signal, which represents a very small part of the frame, timing information, group configuration (number of carriers, bit rates, additional channel assignments), assignments (packet type, id, channel, time slot, packet length), acknowledgement packets (ACKs -packet type, id).

The control channel can also be use as a bulletin board to notify the terminals of beam frequency, back-up frequency, date, time, beam data, access control, return channels, configuration. By notifying the mobile terminals of the times of access, they can be put into a sleep mode between access times, thereby conserving battery power.

30 The control channel represents such as small part of the buffered frame that the extraction of the control information only uses minimal processor resources. Unless the control channel indicates that there is data present for a particular terminal, the DSP 35 in the terminal takes no further action. If the control channel indicates that data is present,

the DSP 35 looks at the appropriate carrier frequencies to extract the digital data destined for the terminal. This means that a terminal can be advised of the presence of data intended for it simultaneously with the transmission of data because the frame carrying the raw data is already present in the terminal's buffer when the information from the control channel is extracted.

The DSP 35 carries out the following signal processing steps:

1. The control channel located in the center of the received band is first decimated and then demodulated.
2. If the control channel indicates an assignment for the terminal in question, the DSP extracts the necessary channel information, such as modulation, bit rate, coding, frequency offset, location in time, and message length.
3. The message is extracted from the stored pre-decimated data.
4. Finally the DSP 35 outputs the message to the destination.

Figure 6 is a block diagram of an implementation of a mobile terminal on a circuit card. DSP 35 is connected to bus 42 along with program memory 41, which stores the instructions for controlling the DSP 35, and data memory 40, which stores the received baseband signal.

Access to the card is through interface unit 43, which provides connections to the analog-to-digital and digital-to-analog converters, and to a serial I/O port, which allows the DSP to be programmed, for example, with the aid of a personal computer.

Latency is minimized because unlike the prior art there is no need for the control information to be sent before the data. Figure 7a shows a prior art protocol. The control station must first transmit a channel assignment on a control channel, which tells a terminal to listen to a particular carrier for a message. Only when this control message has been acknowledged does the control station subsequently transmit a data message on the assigned channel, which is also acknowledged by the receiving terminal.

In a protocol in accordance with the principles of the invention, as shown in figure 7b, the control information and message are transmitted simultaneously and only the data

message is subsequently acknowledged. This is possible because the terminal stores the raw digitized frame in its buffer 34.

The population of terminals can be arranged in groups so that different groups listen to different groups of carriers. For example, a first group of terminals can listen to a first group of carriers, spanning, for example, 50 KHz, a second group can listen to an adjacent group of carriers, and so on. In order to contact a particular terminal, the control station must choose a channel(s) in the group assigned to that terminal.

So far the discussion has only considered the forward link from the ground station to the terminals. A return link, which has a similar structure to the forward link, is provided to permit the terminals to communicate with the ground station.

The structure of the return link is shown in Figure 8. It consists of a 19.2 kbps permanently assigned channel (DA), a 4.8 kbps unslotted RA (random access) channel, and two 4.8 kbps slotted RA channels. The return link has a multiple SCPC architecture, variable bit rate transmission, and robust fade margin. Demodulation of the carriers occurs at the ground station within the sampling bandwidth.

The return link includes the following features: unslotted random access, 64 bit packets, 600, 4800 bit rates, 10% throughput.

The table below gives an example of the return link channel mix.

Throughput (kbps)	600bps			4800bps			19200bps			Bandwidth (kHz)
	R A	S A	D A	R A	S A	D A	R A	S A	D A	
6										30
24.9							1	1	1	60
31.5	1		1	1	1	1	1	1	1	100
5.64	6	6	8							100

The described system provides a flexible satellite packet data system. It offers multiple simultaneous carriers enabled by per frame adaptive processing and high speed DSPs having different bit rates and power levels. A low bit rate control channel provides frequency, timing and frame content information.

The return channels use simultaneous multiple return access methods (slotted and unslotted ALOHA, assigned channel).

A bulletin board notifies terminals of beam frequencies, back-up frequencies, date, time, beam data, access control and return channel configurations.

Generally, the throughput of a transmission link is dependent upon a number of factors, including errors encountered by the transmission path. Techniques, such as Forward Error Correction (FEC) can be used to correct some of the errors on the transmission link. Different algorithms can be employed to match the error level that is tolerable by the application, for example a transition from 3/4 to 1/2 scheme will increase the overhead of the FEC coding, and reduce the number of errors on the link after FEC coding while at the same time reducing the effective throughput (bps) for a given amount of space segment spectrum. Thus, it is advantageous to tolerate as many errors as can be tolerated by the upper layer protocols, applications and eventually the users of the service.

The applications that use the TCP transport layer have their throughput further affected by the TCP handling of errors. A TCP session treats an error as a congestion event in the network and hence reduces the congestion window to slow down the amount of data that can be transferred by the applications. Thus the throughput rate of TCP decreases as the number of errors increase on the link. Therefore for maximum throughput of application data it is imperative to reduce the number of errors on the transmission link.

Since the application data rate is affected by two contradictory factors, there is a need to conserve system resources, such as FEC coding overhead on one side and the TCP throughput constraint due to errors on the other. The stronger FEC produces fewer errors at a cost of higher coding overhead which, in turn, reduces the effective data rate on the channel. Errors on a transmission link cause TCP to lose segments, which are interpreted as congestion in the network which is corrected by reducing the amount of offered traffic to the network. Thus, a small number of errors can substantially reduce the effective throughput by reducing the size of congestion window. In a scenario where, the error rate is varied from a very low rate with techniques, such as a high FEC coding overhead, to a gradually increasing error rate achieved by the corresponding decrease in the FEC overhead, the effective throughput of the system increases until the TCP retransmission and congestion window become the dominant factor for limiting the effective data throughput at which point the throughput to the applications starts to

decrease. Therefore, by monitoring various system variables, such as the FEC coding overhead, the TCP retransmission rate and an effective throughput of data to an application, it is possible to optimized data throughput to an optimum value where the system inputs, such as FEC overhead balances out the TCP congestion restriction.

The optimization of data throughput for the Packet Data System according to one aspect of the present invention as illustrated in Figure 9 employs an Intelligent Bandwidth Manager (IBM) 50. The initial function of IBM 50 is to allocate the spectral bandwidth to each user by some operator defined criteria. This could be as simple as the allocation of equal spectrum to each user, to a provisionable database based on user defined requirements. The IBM resides in the Earth Station Hub 10 (Figure 1) and a simplified version resides in each terminal 11. The Hub IBM utilizes several inputs as shown in Figure 9, to determine the course of action at any specific sampling interval.

The Hub has a database 51 which stores the pertinent information about the total system and each terminal . This includes, but is not limited to, the signal statistics and the Signal to Noise ratio (C/N_0). The signal statistic C/M represent the shape of signal strength against frequency which is useful in determining the information rate for a specific terminal. This measurement is stored for both the forward and the reverse direction. However, if one or these measurements is not available then the other can be used in its place until it is available. The noise level, (C/N_0), represent the ambient noise of the system.

The Hub data base 51 also stores system wide measurements, such as the number of active users at any one time. This information is available to the Hub IBM 50.

The function of Hub IBM is to monitor the effective bandwidth of the system and make changes to input settings in order to maintain an optimum effective bandwidth. The Hub IBM 50 utilizes the aforementioned information available from the data base 51 and the inputs to the IBM 50 as shown in Figure 9 to optimize the service to a user. The input variables for the IBM 50 are the TCP retransmission rate; the input from the database (described earlier); application throughput data rate; the received power level and the recent error pattern. The TCP retransmission rate provides information about the number of retransmissions that were requested within a given sampling interval, the input from the database include measurements and configuration data identified earlier, recent error

pattern are used by the IBM to predict the errors and hence take a corrective action to the errors which are likely to occur and application throughput data rate is the key parameter used to determine if the system is running optimally.

Based on these inputs and the aforementioned objective of optimizing data throughput rate, the IBM 50 makes a decisions for the FEC coding scheme and provides an input to FEC coding function 52. The IBM also decides on the optimum number of bits per frame (or transmission data rate) and provides this information to the framing function 53. Similarly, the IBM provides information respecting the Modulating scheme and the Transmit Power level to the appropriate functional blocks 54, 55, respectively, in the system as shown in Figure 9. The decision, in IBM, is made by an expert system using heuristic rules to alter the above parameters for the purpose of optimizing the bandwidth to the application. The heuristic rules are defined by an 'expert' with the intuitive knowledge of the operation of the system.

A Terminal IBM (not shown), controls a single terminal, and is similar to the Hub IBM of Figure 9 except that the EIRP (effective isotropic radiation power) output to the Power Amplifier is not required as the terminal always works on the maximum power. In addition, it does not need a database as the measurements pertain to one terminal and the measurements can be stored locally.

The 'expert' rules are composed using natural language to define the relationship between various input variables and the effective output data rate. These rules are then translated into equivalent representations using fuzzy logic for use by the decision engine that runs on the rules to mimic human decision making. The input measurements are translated into a unique set of conditions that drive the decision engine using the rules defined by 'experts' to make a decision which mimics a decision that a human being would have made in similar situations.

Although the system has been described as implemented with a DSP, it will be understood by one skilled in the art that it is also possible to implement it in a general purpose microprocessor, such as a Pentium II, for example.

The system has a novel packet structure and low latency due to an improved protocol requiring fewer acknowledgements.

Claims:

1. A packet data communication system having a control station and a plurality of remote terminals that communicate on demand with said control station over a wireless link,
 - said control station comprising
 - a data port for receiving data packets destined for said terminals;
 - means for generating a plurality of data channels for carrying said data packets;
 - means for assigning said data packets destined for a particular terminal to one or more of said data channels;
 - means for generating a control channel carrying control information pertaining to said data channels; and
 - means for transmitting said carriers to said remote terminals as an r.f. signal; and
 - each of said terminals comprising
 - a receiver for receiving said r.f. signal;
 - an analog-to-digital converter for digitizing said received signal;
 - a buffer for storing said digitized received signal;
 - means for monitoring said control channel to extract control information therefrom; and
 - means for processing said stored signal to extract said packet data destined for said terminal from one or more of said data channels in response to control information received on said control channel.
2. A packet data communication system as claimed in claim 1, wherein said transmitting means transmits said carriers as a framed baseband signal, each frame containing one or more data channels and the control channel.
3. A packet data communication system as claimed in claim 2, wherein said buffer stores a frame of raw baseband data.
4. A packet data communication system as claimed in claim 3, wherein said monitoring means comprises a digital signal processor for extracting said control channel from said stored frame of raw baseband data.

5. A packet data communication system as claimed in claim 1, wherein each said terminal further comprises a demodulator for demodulating said received r.f. signal prior to analog-to-digital conversion.
6. A packet data communication system as claimed in claim 5, wherein said demodulator is a quadrature demodulator.
7. A packet data communication system as claimed in claim 4, wherein said digital signal processor also provides said processing means, said digital signal processor extracting data from carriers identified by said control signal.
8. A packet data communication system as defined in claim 1, where said means for assigning data packets includes means to dynamically assign said data packets to one or more channel types.
9. A packet data communication system as defined in claim 8 wherein said channel types include: random access channels; assigned TDM channels; assigned TDMA channels; and dedicated channels.
10. A method of establishing communication between a control station and one or more of a plurality of mobile terminals over a wireless link, comprising the steps of:
 - generating a plurality of carriers;
 - dynamically assigning one or more data carriers to a destination terminal;
 - modulating said one or more carriers with packet data for said destination terminal;
 - generating a control carrier containing information pertaining to said modulated carriers;
 - transmitting said data carriers and said control carrier as an aggregate signal to said destination terminal;
 - buffering said aggregate signal at said destination terminal;
 - extracting said control information from said aggregate signal;
 - and extracting data from said buffered signal in response to a received assignment in said control information.
11. A method as claimed in claim 10, wherein said aggregate signal is transmitted as a framed signal, each frame containing one or more of said carriers and said control signal.

12. A method as claimed in claim 11, wherein said aggregate signal is stored in said buffer one frame at a time, and said control information is extracted from said stored frame to determine whether it contains data intended for the destination terminal.
13. A method as claimed in claim 10 wherein said aggregate signal comprises a baseband signal that is modulated onto an r.f. carrier.
14. A method as claimed in claim 13, wherein said r.f. carrier is first demodulated at said terminal to extract said baseband signal, and said baseband signal is then passed through an analog-to-digital converter prior to being buffered in said terminal.
15. A mobile terminal for receiving data from a packet data communication system having a control station and a plurality of remote terminals that communicate on demand with said control station over a wireless link, said terminal comprising:
- a receiver for receiving an incoming signal;
 - an analog-to-digital converter for digitizing said received signal;
 - a buffer for storing said digitized received signal;
 - means for monitoring said control channel to extract control information therefrom; and
 - means for processing said stored signal to extract packet data destined for said terminal from one or more of said data channels in response to control information received on said control channel.
16. A mobile terminal as claimed in claim 15, further comprising a demodulator for demodulating said incoming signal to baseband before said incoming signal is passed to said analog-to-digital converter.
17. A mobile terminal as claimed in claim 15, wherein said means for monitoring and said means for processing are implemented in a digital signal processor.
18. A mobile terminal as claimed in claim 16, wherein said means for monitoring and said means for processing are implemented in a digital signal processor.
19. A mobile terminal as claimed in claim 15 including means to dynamically assign data packets to various channel types for communicating with said control station.

20 A bandwidth management system for improving data throughput of a packet data communication network comprising:

means for receiving current network performance information;

storage means for storing statistical information respecting said network; and

means for comparing said current and statistical information and for adjusting network parameters based on said comparison in order to improve data throughput.

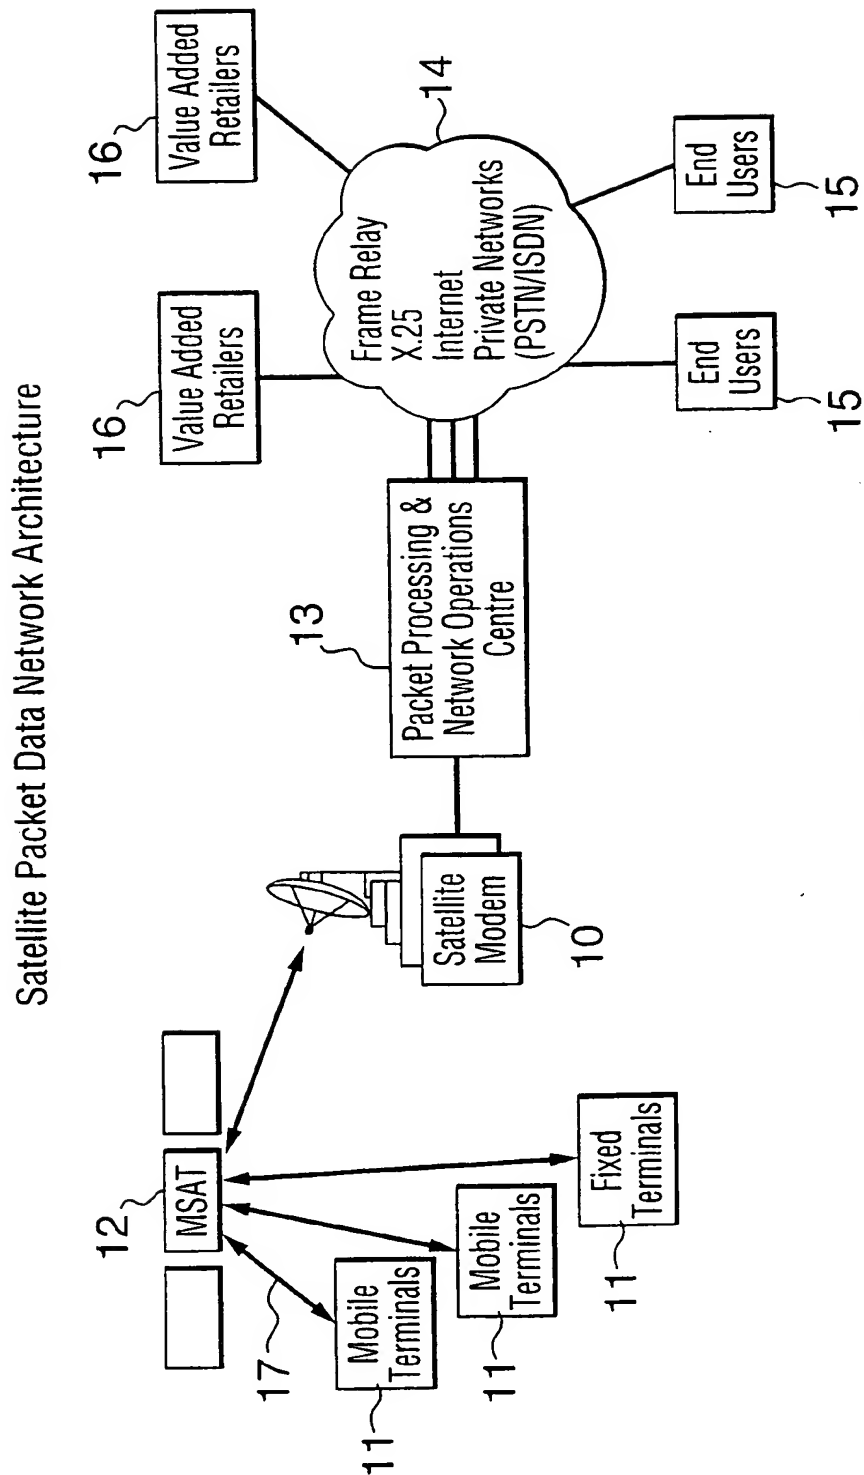


FIG. 1

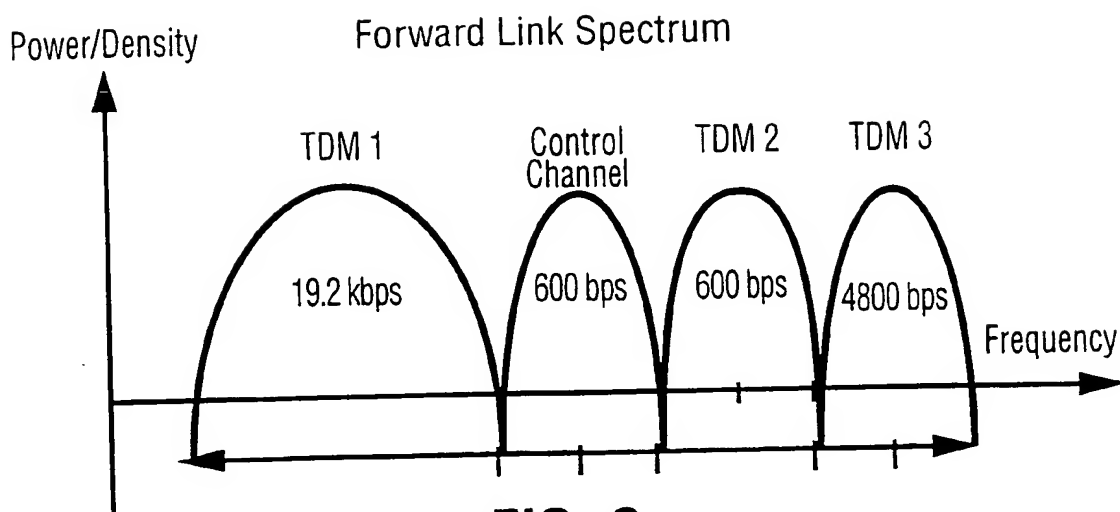


FIG. 2

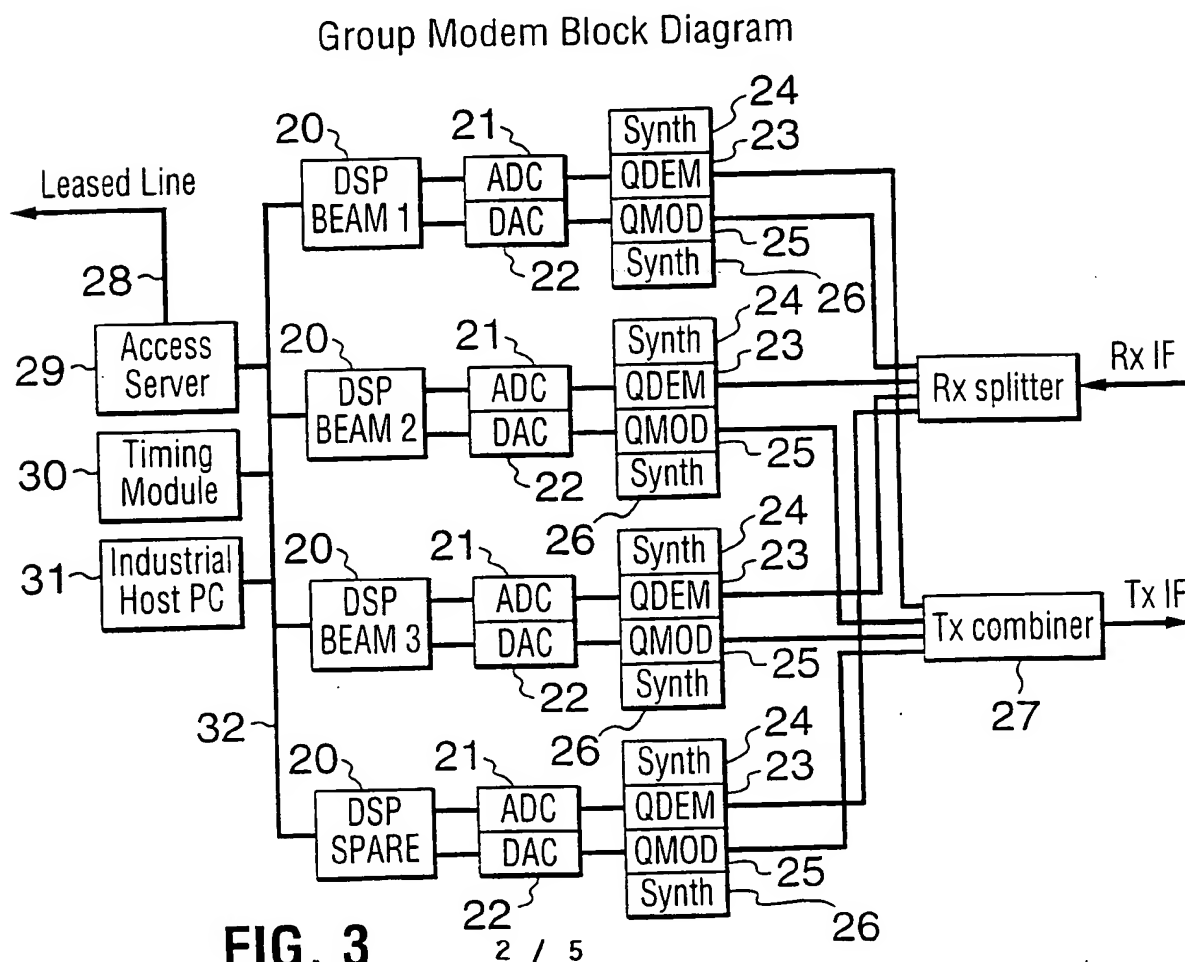


FIG. 3

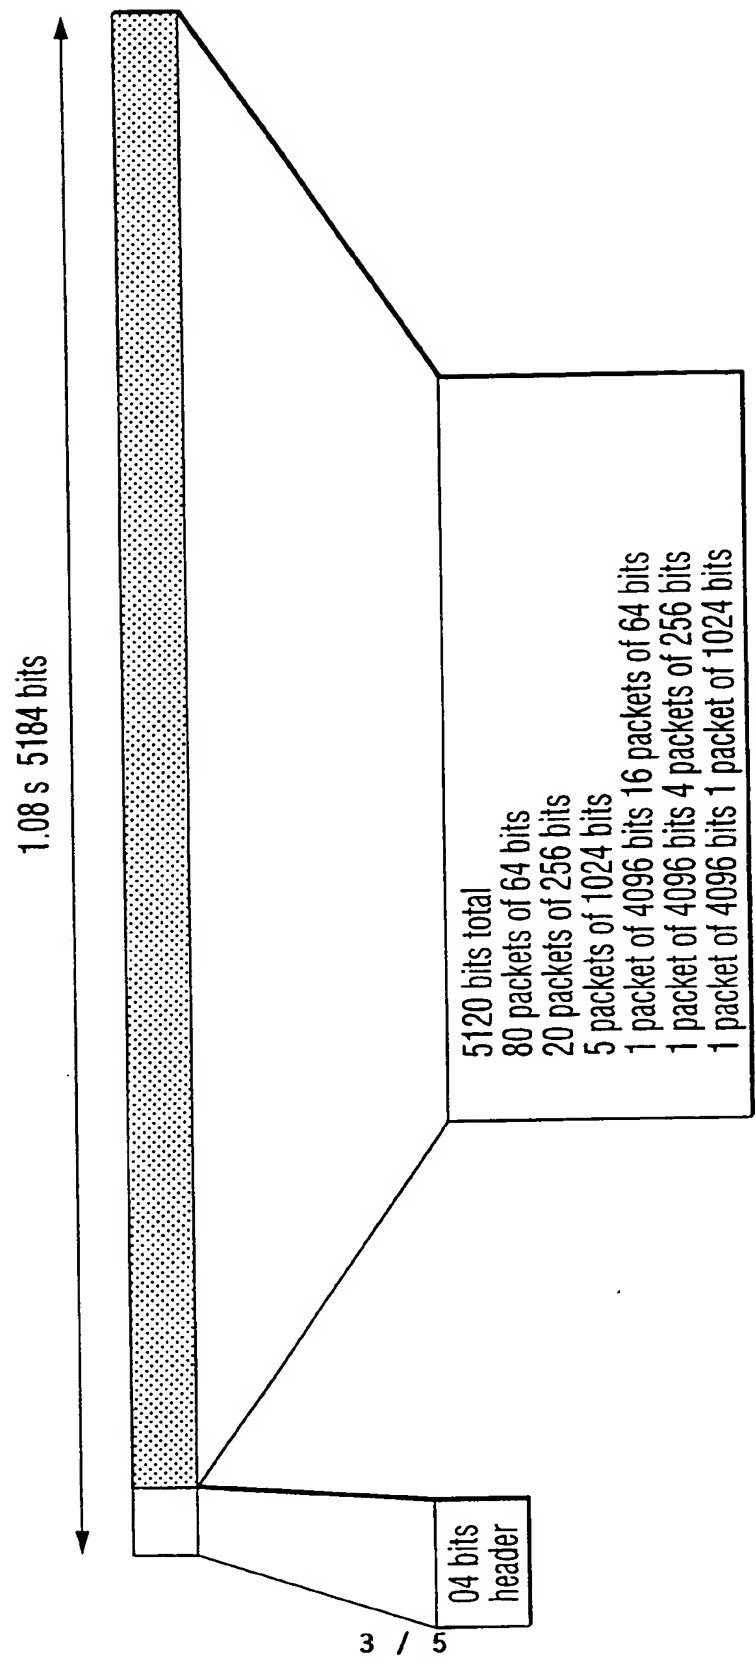


FIG. 4

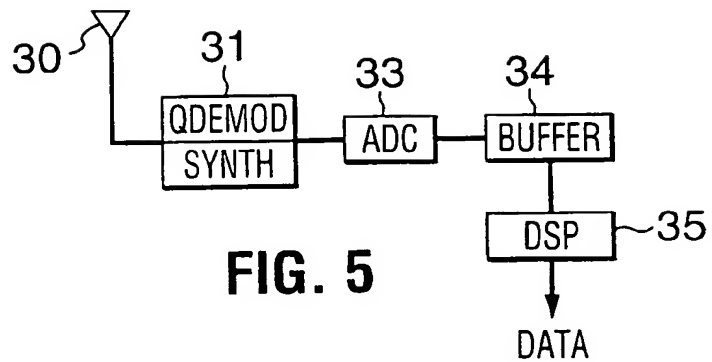


FIG. 5

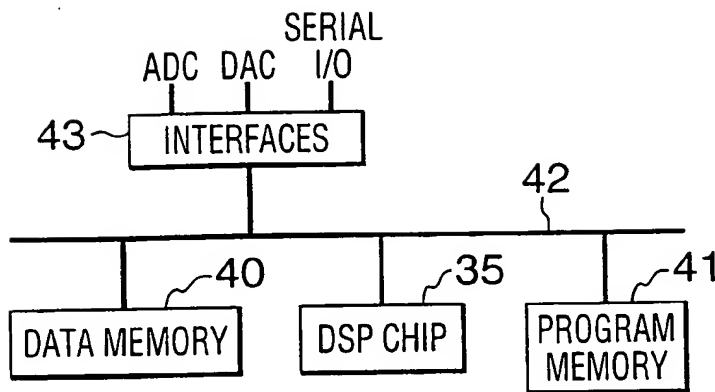


FIG. 6

Current Protocol

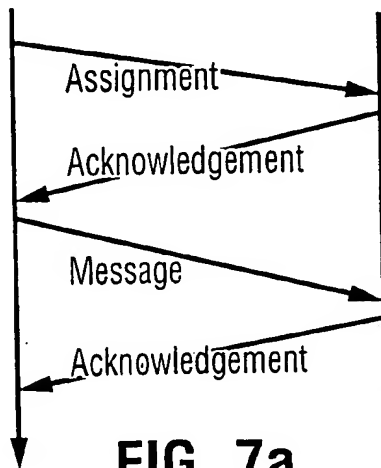


FIG. 7a

New Protocol

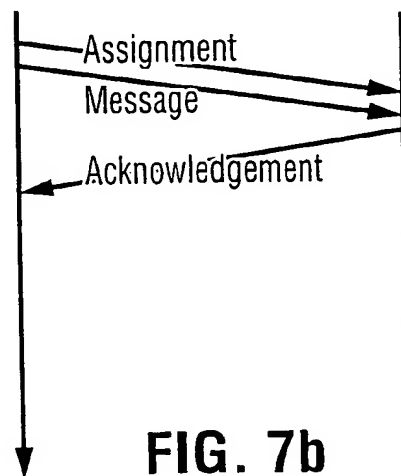


FIG. 7b

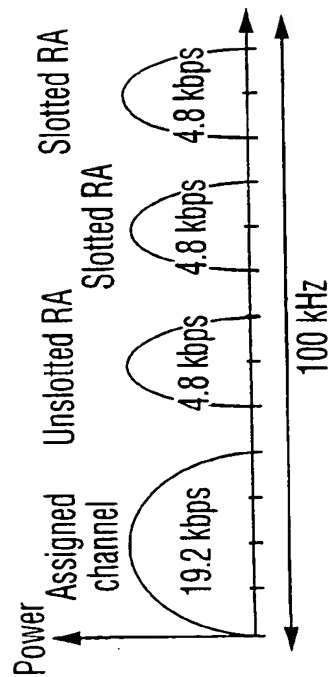


FIG. 8

Signal_statistics = C/M
Signal to Noise ratio = C/N₀
Number of active users

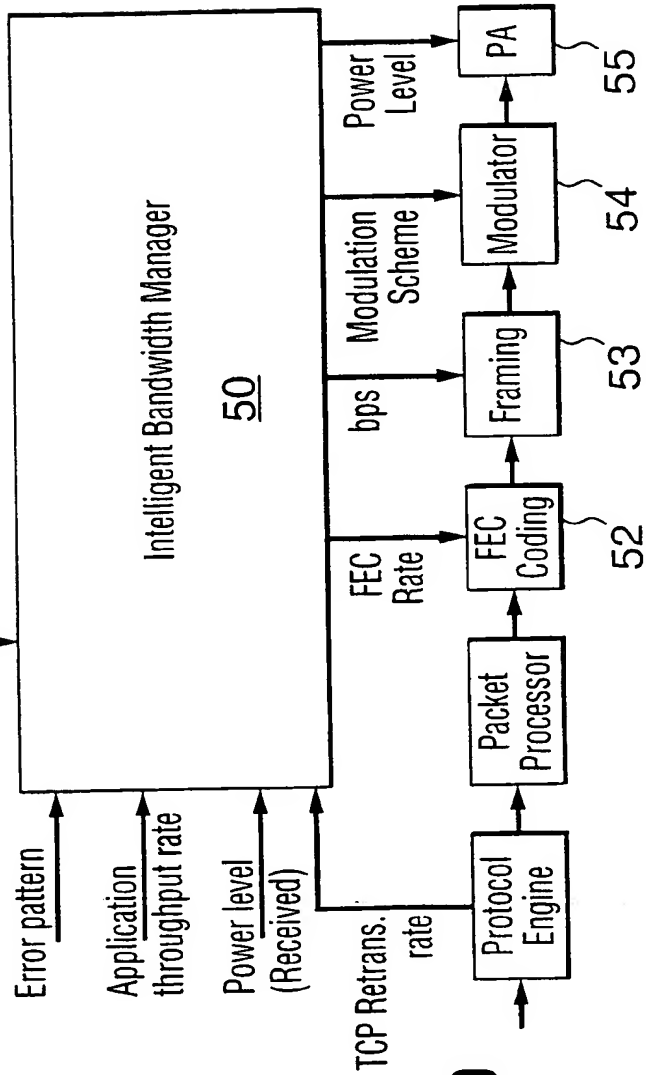


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 99/00247

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04B7/212 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 687 078 A (NOKIA MOBILE PHONES LTD) 13 December 1995 see abstract see column 1, line 19 - line 49 see column 4, line 31 - column 5, line 3 see claims 1-9	1-4, 8, 10-13, 15, 17, 19, 20
Y	US 4 726 040 A (ACAMPORA ANTHONY) 16 February 1988 see abstract see column 2, line 67 - column 4, line 17 see claims 1-4; figure 1 --- -/--	1-4, 8, 10-13, 15, 17, 19

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

8 June 1999

Date of mailing of the international search report

16/06/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lazaridis, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 99/00247

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>EP 0 802 677 A (HUGHES AIRCRAFT CO) 22 October 1997 see abstract see page 4, line 56 - page 5, line 13 see page 6, line 39 - line 52 see claims 1,4,5,10 -----</p>	20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 99/00247

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0687078	A	13-12-1995	FI 942702 A	09-12-1995
			CN 1115164 A	17-01-1996
			JP 7336774 A	22-12-1995
			US 5729541 A	17-03-1998
US 4726040	A	16-02-1988	CA 1256607 A	27-06-1989
EP 0802677	A	22-10-1997	JP 10051497 A	20-02-1998